

ASSEMBLY INSTRUCTIONS



Alua Headboard

Parts List (3 Parts)

1. Headboard assembly
2. Wall gravity

Hardware

A Hiltis

x 4




The headboard is designed to be hung by gravity cleat fixed to the wall with supplied hiltis.



Installation

- ▶ Mark appropriate height and position on the wall to be hung to
- ▶ Drill 6mm holes into wall.
- ▶ Ensure the angled edge of the wall cleat face upwards and the smaller face of the cleat attaches to the wall.
- ▶ Insert hiltis through pre-drilled holes in wall cleat and fasten securely.
- ▶ Lower the headboard over the cleat making sure the angled cleat on the headboard is on top.
- ▶ Ensure the two angled cleats fit into each other and press down lightly.

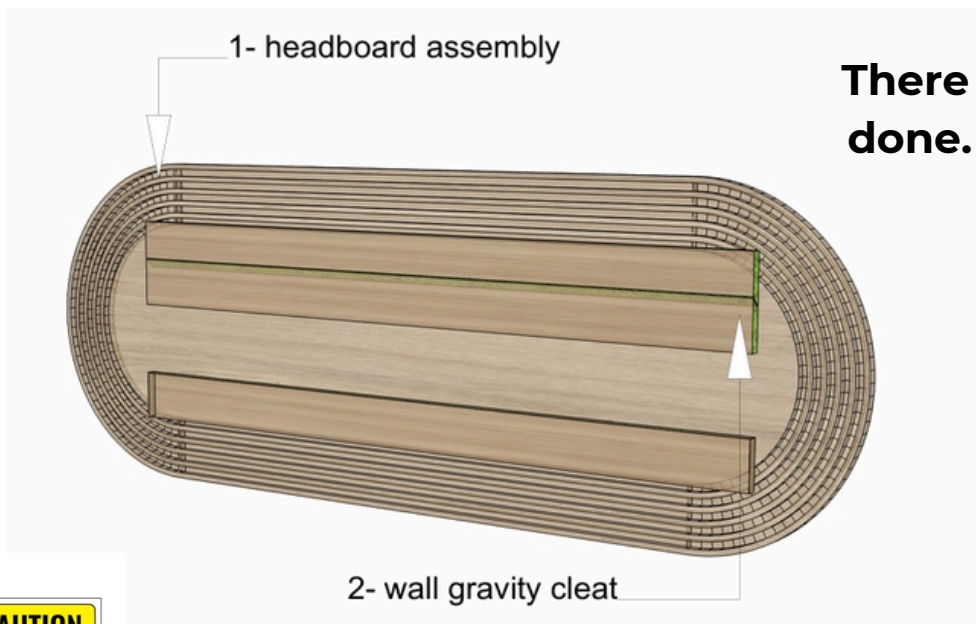

There we go! You are all done. Congratulations !



**Find us on
WhatsApp!**



CLEANING INSTRUCTIONS

NB: Clean with a damp cloth only.

Excessive water will cause damage, voiding the warranty.